

LANVIGATOR

Tire Direct
La nueva generación



www.tiredirect.com.mx

TOURING HP SUV MT AT HT
ALL SEASON UHP



FASTONE

A GREAT WAY TO LOOK FURTHER

PERSEVERANCE

LONG-LASTING

TOURING HP (High-performance tires) made with high-quality compounds for the ultra-long-distance car travel.

Improvements in tread and structural design result in lower tire noise, contributing to a more pleasant driving experience.



Long-lasting
Blowout-proof



Noise-reducing



Smooth
Comfortable



**High-wear-resistant
rubber material**



**Wear-resistant
tread pattern**



**Optimally formulated
hardness-to-elasticity
ratio**



**Noise-reducing tire
structure design**

Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
165/65R13	77	T	7	170	5J	544	560AA	412	908	300	44
165/70R13	79	T	7	170	5J	562	560AA	437	963	300	44
175/70R13	82	T	7	177	5J	576	560AA	475	1047	300	44
185/70R13	86	T	7	189	5 1/2J	590	560AA	530	1168	300	44
165/60R14	75	H	7	170	5J	554	560AA	387	853	300	44
165/65R14	79	H	7	170	5J	570	560AA	437	963	300	44
165/70R14	81	T	7	170	5J	588	560AA	462	1019	300	44
175/65R14	86	TXL	7	177	5J	584	560AA	530	1168	340	50
175/70R14	84	T	7	177	5J	602	560AA	500	1102	300	44
185/70R14	88	T	7	189	5 1/2J	616	560AA	560	1235	300	44
185/60R14	82	H	7	189	5 1/2J	578	560AA	475	1047	300	44
185/65R14	86	H	7	189	5 1/2J	596	560AA	530	1168	300	44
195/70R14	91	T	7	201	6J	630	560AA	615	1356	300	44
205/70R14	95	T	7	209	6J	644	560AA	690	1521	300	44
205/75R14	95	T	7.5	203	5 1/2J	664	560AA	690	1521	300	44
215/70R14	96	T	7.5	221	6 1/2J	658	560AA	710	1565	300	44
175/65R15	84	H	7	177	5J	609	560AA	500	1102	300	44
185/55R15	82	V	7.2	194	6J	585	560AA	475	1047	300	44
185/60R15	84	H	7.2	189	5 1/2J	603	560AA	500	1102	300	44
185/65R15	88	H	7.2	189	5 1/2J	621	560AA	560	1235	300	44
195/50R15	82	V	7.5	201	6J	577	560AA	475	1047	300	44
195/55R15	85	V	7.5	201	6J	595	560AA	515	1135	300	44
195/60R15	88	V	7.5	201	6J	615	560AA	560	1235	300	44
195/65R15	91	V	7.5	201	6J	635	560AA	615	1356	300	44
205/60R15	91	V	7.5	209	6J	627	560AA	615	1356	300	44
205/65R15	94	H	7.5	209	6J	647	560AA	670	1477	300	44
205/70R15	96	T	7.5	209	6J	669	560AA	710	1565	300	44
215/65R15	96	H	7.5	221	6 1/2J	661	560AA	710	1565	300	44
215/70R15	98	T	7.5	221	6 1/2J	683	560AA	750	1653	300	44
225/70R15	100	T	7.5	228	6 1/2J	697	560AA	800	1764	300	44
195/55R16	87	V	7.5	201	6J	620	560AA	545	1201	300	44
205/60R16	92	V	7.5	209	6J	652	560AA	630	1389	300	44
205/65R16	95	H	7.5	209	6J	672	560AA	690	1521	300	44
205/70R16	97	H	7.5	209	6J	694	560AA	730	1609	300	44
215/60R16	95	V	7.5	221	6 1/2J	664	560AA	690	1521	300	44
215/65R16	98	H	7.5	221	6 1/2J	686	560AA	750	1653	300	44
215/70R16	100	H	7.5	221	6 1/2J	708	560AA	800	1764	300	44
225/60R16	98	V	7.5	228	6 1/2J	676	560AA	750	1653	300	44
225/65R16	100	H	7.5	228	6 1/2J	698	560AA	800	1764	300	44
235/60R16	100	V	7.5	240	7J	688	560AA	800	1764	300	44

EXCITE

-Tranquility Leads to Far-reaching Goals -Excellence Leads to Smooth Progress

Embrace authenticity in your journey
Alongside freedom, gallop and pursue excellence together

- **EXCITE** is an All Season UHP tire that features a new tread design that provides excellent handling performance on both dry and wet roads, offering drivers a superior driving experience.
- The application of new materials can not only improve the quality of tires and reduce tread wear, but also to some extent improve the driving experience.



Tire Direct
La nueva generación



COMFORTABLE RIDING



Optimized tread pattern and spacing effectively reduce noise, making driving quieter and more comfortable.

Three straight ribs enhance straight-line driving performance and ensure driving stability.



WEARRESISTANT




High-quality rubber formula is used in the material and craftsmanship, giving it abrasion resistance and thus providing a longer tread life.



SUREFOOTED & BREAKING



Asymmetric tread pattern on the inside and outside of the tire improves drainage performance and grip on wet roads, resulting in excellent handling.



The arrangement and combination of fine grooves give it good handling and braking performance on snow, highlighting the superiority of all-season tires in adapting to different seasons and climates.



EXCITE

-Tranquility Leads to Far-reaching Goals -Excellence Leads to Smooth Progress

Tire Direct
La nueva generación


Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi	Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
205/45ZR16	87	WXL	7	206	7J	590	420AA	545	1201	340	50	285/40ZR19	107	YXL	7	290	10J	711	420AA	975	2149	340	50
205/50ZR16	91	WXL	7.3	214	6 1/2J	612	420AA	615	1356	340	50	285/45ZR19	107	Y	7	285	9 1/2J	739	420AA	975	2149	300	44
205/55R16	91	V	7.3	214	6 1/2J	632	420AA	615	1356	300	44	305/25ZR20	97	WXL	7	313	11J	660	420AA	730	1609	340	50
215/55R16	97	VXL	7.3	226	7J	642	420AA	730	1609	340	50	225/30ZR20	85	WXL	7	230	8J	644	420AA	515	1135	340	50
225/50ZR16	96	WXL	7.3	233	7J	632	420AA	710	1565	340	50	225/35ZR20	93	WXL	7	230	8J	666	420AA	650	1433	340	50
225/55R16	99	VXL	7.3	233	7J	654	420AA	775	1709	340	50	235/35ZR20	92	WXL	7	241	8 1/2J	672	420AA	630	1389	340	50
205/40ZR17	84	WXL	7	212	7 1/2J	596	420AA	500	1102	340	50	245/30ZR20	97	WXL	7	248	8 1/2J	656	420AA	730	1609	340	50
205/45ZR17	88	WXL	7	206	7J	616	420AA	560	1235	340	50	245/35ZR20	95	WXL	7	248	8 1/2J	680	420AA	690	1521	340	50
205/50ZR17	93	WXL	7.3	214	6 1/2J	638	420AA	650	1433	340	50	245/40ZR20	99	WXL	7	248	8 1/2J	704	420AA	775	1709	340	50
215/45ZR17	91	WXL	7	213	7J	626	420AA	615	1356	340	50	245/45ZR20	103	WXL	7	243	8J	728	420AA	875	1929	340	50
215/50ZR17	95	WXL	7.3	226	7J	648	420AA	690	1521	340	50	255/30ZR20	92	WXL	7	260	9J	662	420AA	630	1389	340	50
215/55ZR17	98	WXL	7.3	226	7J	668	420AA	750	1653	340	50	255/35ZR20	97	WXL	7	260	9J	686	420AA	730	1609	340	50
225/45ZR17	94	WXL	7	225	7 1/2J	634	420AA	670	1477	340	50	255/45ZR20	105	WXL	7	255	8 1/2J	738	420AA	925	2039	340	50
225/50ZR17	98	WXL	7.3	233	7J	658	420AA	750	1653	340	50	255/50ZR20	109	WXL	7.3	265	8J	764	420AA	1030	2271	340	50
225/55ZR17	101	WXL	7.3	233	7J	680	420AA	825	1819	340	50	265/45ZR20	108	YXL	7	266	9J	746	420AA	1000	2204	340	50
235/45ZR17	97	WXL	7	236	8J	644	420AA	730	1609	340	50	265/50ZR20	111	WXL	7.3	277	8 1/2J	774	420AA	1090	2403	340	50
235/50ZR17	100	WXL	7.3	245	7 1/2J	668	420AA	800	1764	340	50	275/30ZR20	97	WXL	7	278	9 1/2J	674	420AA	730	1609	340	50
235/55ZR17	103	WXL	7.3	245	7 1/2J	690	420AA	875	1929	340	50	275/35ZR20	102	WXL	7	278	9 1/2J	700	420AA	850	1874	340	50
245/40ZR17	95	WXL	7	248	8 1/2J	628	420AA	690	1521	340	50	275/40ZR20	106	WXL	7	278	9 1/2J	728	420AA	950	2094	340	50
245/45ZR17	99	WXL	7	243	8J	652	420AA	775	1709	340	50	275/45ZR20	110	WXL	7	273	9J	756	420AA	1060	2337	340	50
215/35ZR18	84	WXL	7	218	7 1/2J	607	420AA	500	1102	340	50	275/50ZR20	113	WXL	7.3	284	8 1/2J	784	420AA	1150	2535	340	50
215/40ZR18	89	WXL	7	218	7 1/2J	629	420AA	580	1279	340	50	275/55ZR20	117	WXL	7.3	284	8 1/2J	810	420AA	1285	2833	340	50
215/45ZR18	93	WXL	7	213	7J	651	420AA	650	1433	340	50	285/25ZR20	93	WXL	7	295	10 1/2J	650	420AA	650	1433	340	50
215/55R18	99	VXL	7.3	226	7J	693	420AA	775	1709	340	50	285/30ZR20	99	WXL	7	290	10J	680	420AA	775	1709	340	50
225/40ZR18	92	WXL	7	230	8J	637	420AA	630	1389	340	50	285/50ZR20	116	WXL	7.3	297	9J	794	420AA	1250	2756	340	50
225/45ZR18	95	WXL	7	225	7 1/2J	659	420AA	690	1521	340	50	305/35ZR20	107	YXL	7	313	11J	722	420AA	975	2149	340	50
225/50ZR18	99	WXL	7.3	233	7J	683	420AA	775	1709	340	50	315/35ZR20	110	WXL	7	320	11J	728	420AA	1060	2337	340	50
225/55ZR18	102	WXL	7.3	233	7J	705	420AA	850	1874	340	50	245/35ZR21	96	YXL	7	248	8 1/2J	705	420AA	710	1565	340	50
235/40ZR18	95	WXL	7	241	8 1/2J	645	420AA	690	1521	340	50	265/35ZR21	101	YXL	7	271	9 1/2J	719	420AA	825	1819	340	50
235/45ZR18	98	WXL	7	236	8J	669	420AA	750	1653	340	50	265/40ZR21	105	YXL	7	271	9 1/2J	745	420AA	925	2039	340	50
235/50ZR18	101	WXL	7.3	245	7 1/2J	693	420AA	825	1819	340	50	275/30ZR21	102	YXL	7	278	9 1/2J	699	420AA	850	1874	340	50
235/55ZR18	104	WXL	7.3	245	7 1/2J	715	420AA	900	1984	340	50	295/35ZR21	107	YXL	7	301	10 1/2J	739	420AA	975	2149	340	50
245/40ZR18	97	WXL	7	248	8 1/2J	653	420AA	730	1609	340	50	325/30ZR21	110	YXL	7	331	11 1/2J	729	420AA	1060	2337	340	50
245/45ZR18	100	WXL	7	243	8J	677	420AA	800	1764	340	50	235/30ZR22	90	WXL	7	242	8 1/2J	701	420AA	600	1323	340	50
255/35ZR18	94	WXL	7	260	9J	635	420AA	670	1477	340	50	245/30ZR22	92	WXL	7	248	8 1/2J	707	420AA	630	1389	340	50
255/40ZR18	99	WXL	7	260	9J	661	420AA	775	1709	340	50	255/30ZR22	95	WXL	7	260	9J	713	420AA	690	1521	340	50
255/45ZR18	103	WXL	7	255	8 1/2J	687	420AA	875	1929	340	50	265/30ZR22	97	WXL	7	271	9 1/2J	719	420AA	730	1609	340	50
255/50R18	106	VXL	7.3	265	8J	713	420AA	950	2094	340	50	265/35ZR22	102	WXL	7	271	9 1/2J	745	420AA	850	1874	340	50
255/55ZR18	109	WXL	7.3	265	8J	737	420AA	1030	2271	340	50	265/40ZR22	106	WXL	7	271	9 1/2J	771	420AA	950	2094	340	50
225/40ZR19	93	WXL	7	230	8J	663	420AA	650	1433	340	50	275/45ZR22	112	WXL	7	273	9J	807	420AA	1120	2469	340	50
235/35ZR19	91	WXL	7	241	8 1/2J	647	420AA	615	1356	340	50	285/35ZR22	106	WXL	7	290	10J	759	420AA	950	2094	340	50
235/40ZR19	96	WXL	7	241	8 1/2J	671	420AA	710	1565	340	50	285/40ZR22	110	WXL	7	290	10J	787	420AA	1060	2337	340	50
235/55ZR19	105	WXL	7.3	245	7 1/2J	741	420AA	925	2039	340	50	285/45ZR22	114	WXL	7	285	9 1/2J	815	420AA	1180	2601	340	50
245/40ZR19	98	WXL	7	248	8 1/2J	679	420AA	750	1653	340	50	295/30ZR22	110	YXL	7	301	10 1/2J	737	420AA	1060	2337	340	50
245/45ZR19	102	WXL	7	243	8J	703	420AA	850	1874	340	50	305/25ZR22	103	YXL	7	313	11J	711	420AA	875	1929	340	50
245/55ZR19	107	WXL	7.3	253	7 1/2J	753	420AA	975	2149	340	50	305/40ZR22	114	WXL	7	313	11J	803	420AA	1180	2601	340	50
255/40ZR19	100	WXL	7	260	9J	687	420AA	800	1764	340	50	305/45ZR22	118	WXL	7	303	10J	833	420AA	1320	2910	340	50
255/45ZR19	104	WXL	7	255	8 1/2J	713	420AA	900	1984	340	50	315/30ZR22	107	YXL	7	320	11J	749	420AA	975	2149	340	50
255/50ZR19	107	WXL	7.3	265	8J	739	420AA	975	2149	340	50	255/30ZR24	97	WXL	7	260	9J	764	420AA	730	1609	340	50
255/55ZR19	111	WXL	7.3	265	8J	763	420AA	1090	2403	340	50	275/25ZR24	96	WXL	7	283	10J	748	420AA	710	1565	340	50
265/35ZR19	98	WXL	7	271	9 1/2J	669	420AA	750	1653	340	50	275/30ZR24	101	WXL	7	278	9 1/2J	776	420AA	825	1819	340	50
275/40ZR19	105	YXL	7	278	9 1/2J	703	420AA	925	2039	340	50	295/35ZR24	110	WXL	7	301	10 1/2J	816	420AA	1060	2337	340	50
285/35ZR19	103	YXL	7	290	10J	683	420AA	875	1929	340	50	305/35ZR24	112	WXL	7	313	11J	824	420AA	1120	2469	340	50

CELESTE SUV/CUV

COMFORTABLE DRIVING EFFORLESS CONTROL

A TIRE SPECIALLY DESIGNED FOR SUVs/CUVs, AIMING TO CREATE COMFORTABLE DRIVING CONDITIONS AND A RESPONSIVE HANDLING EXPERIENCE.

THROUGH THE OPTIMIZATION OF TREAD PATTERN DESIGN AND FORMULA, IT HAS ACHIEVED COMPREHENSIVE IMPROVEMENT IN TERMS OF NOISE REDUCTION, HANDLING, AND SERVICE LIFE.

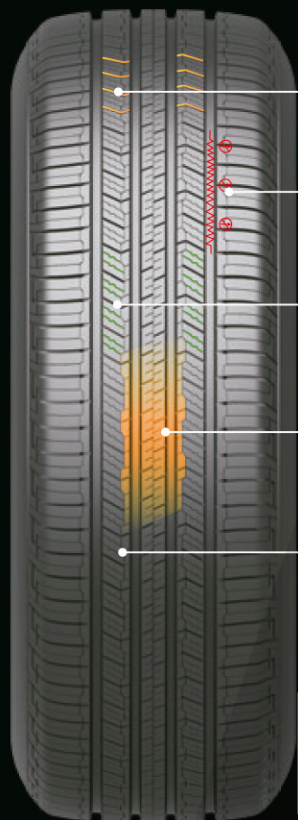


Optimized horizontal groove direction to minimize noise generation.

Half-closed shoulder design blocks noise between the tire tread and the road surface, preventing it from spreading outward.

Dense micro grooves ensure that the water film can be cut on wet roads, allowing the tire tread to penetrate the water and grip the ground to prevent skidding.

Chain-like rib design enhances the strength of the tire tread's middle section, making it resistant to deformation and ensuring precise cornering and responsive handling.

The tread adopts a new generation of anti-tear formula, which is more wear-resistant and has a 10% longer lifespan than similar competitive products.

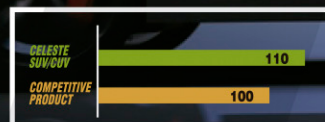

SUV/CUV



COMFORTABLE



LONG-LASTING



DRY/WET PERFORMANCE



SILENCE

Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
235/75R15	109	TXL	8	235	6 1/2J	733	620AA	1030	2271	340	50
215/65R16	98	H	8	221	6 1/2J	686	620AA	750	1653	300	44
215/70R16	100	H	8	221	6 1/2J	708	620AA	800	1764	300	44
225/70R16	103	H	8	228	6 1/2J	722	620AA	875	1929	300	44
235/70R16	106	H	8	240	7J	736	620AA	950	2094	300	44
245/70R16	107	H	8	248	7J	750	620AA	975	2149	300	44
255/70R16	111	H	8.4	260	7 1/2J	764	620AA	1090	2403	300	44
265/70R16	112	H	8.4	272	8J	778	620AA	1120	2469	300	44
235/65R16	107	HXL	8	240	7J	712	620AA	975	2149	340	50
245/75R16	111	T	8	248	7J	774	620AA	1090	2403	300	44
265/75R16	116	T	8.4	267	7 1/2J	804	620AA	1250	2756	300	44
215/60R17	96	V	8	221	6 1/2J	690	620AA	710	1565	300	44
215/65R17	99	V	8	221	6 1/2J	712	620AA	775	1709	300	44
215/70R17	101	H	8	221	6 1/2J	734	620AA	825	1819	300	44
225/60R17	99	H	8	228	6 1/2J	702	620AA	775	1709	300	44
225/65R17	102	H	8	228	6 1/2J	724	620AA	850	1874	300	44
235/60R17	102	H	8	240	7J	714	620AA	850	1874	300	44
235/65R17	108	HXL	8	240	7J	738	620AA	1000	2205	340	50
245/65R17	107	H	8	248	7J	750	620AA	975	2149	300	44
265/65R17	112	H	8.4	272	8J	776	620AA	1120	2469	300	44
245/70R17	110	H	8	248	7J	776	620AA	1060	2337	300	44
255/70R17	112	H	8.4	260	7 1/2J	790	620AA	1120	2469	300	44
265/70R17	115	H	8.4	272	8J	804	620AA	1215	2679	300	44
225/60R18	100	H	8	228	6 1/2J	727	620AA	800	1764	300	44
235/60R18	107	HXL	8	240	7J	739	620AA	975	2149	340	50
235/65R18	110	HXL	8	240	7J	763	620AA	1060	2337	340	50
245/60R18	105	V	8	248	7J	751	620AA	925	2039	300	44
255/70R18	113	H	8.4	260	7 1/2J	815	620AA	1150	2535	300	44
265/60R18	110	H	8.4	272	8J	775	620AA	1060	2337	300	44
265/65R18	114	H	8.4	272	8J	801	620AA	1180	2601	300	44
265/70R18	116	T	8.4	272	8J	829	620AA	1250	2756	300	44
275/65R18	116	H	8.4	279	8J	815	620AA	1250	2756	300	44
275/60R20	115	H	8.4	279	8J	838	620AA	1215	2679	300	44


BANGER HT

Extra Strong Load-bearing Capacity | Comfortable Wear Resistance

Tire Direct
La nueva generación

BANGER HT is a high-performance tire specifically designed for light trucks and full-size SUVs. Features low noise and high-strength wear resistance, providing a comfortable driving experience and an extra-long lifespan.

BANGER HT outstanding styling is integrated into the aesthetic design, which not only enhances tire life but also brings an ultimate aesthetic experience.

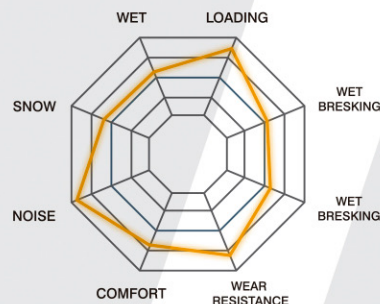

Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
LT215/85R16 10PR	115/112	S	9.1	216	6J	772	1215/1120	2680/2470	550	80
LT225/75R16 10PR	115/112	S	9.5	223	6J	744	1215/1120	2680/2470	550	80
235/65R16C 10PR	121/119	R	9.1	240	7J	712	1450/1360	3195/3000	575	83
LT235/85R16 10PR	120/116	S	9.1	235	6 1/2J	806	1380/1260	3042/2778	550	80
LT245/75R16 10PR	120/116	S	9.5	248	7J	774	1380/1260	3042/2778	550	80
LT265/75R16 10PR	123/120	S	9.9	267	7 1/2J	804	1550/1400	3415/3085	550	80
LT235/80R17 10PR	120/117	S	9.1	235	6 1/2J	808	1400/1285	3085/2835	550	80
LT245/70R17 10PR	119/116	S	9.5	248	7J	776	1360/1250	3000/2755	550	80
LT265/70R17 10PR	123/120	S	9.9	272	8J	804	1550/1400	3415/3085	550	80
LT245/75R17 10PR	121/118	S	9.5	248	7J	800	1450/1320	3195/2910	550	80
LT265/70R18 10PR	124/121	S	9.9	272	8J	829	1600/1450	3525/3195	550	80
LT275/65R18 10PR	123/120	S	9.9	279	8J	815	1550/1400	3415/3085	550	80
LT275/70R18 10PR	125/122	S	9.9	279	8J	843	1650/1500	3640/3305	550	80
LT275/65R20 10PR	126/123	S	9.9	279	8J	866	1700/1550	3750/3415	550	80



LOADING

Non-continuous shoulder blocks and high-strength tread blocks provide high load-bearing stability.



NOISE

Optimized shoulder groove design reduces noise for a comfortable and quiet driving experience.



WEAR RESISTANCE

The central rib is integrated into the aesthetic design, and the outstanding appearance not only enhances the tire's lifespan but also brings an ultimate aesthetic experience.



NOISE REDUCTION COMFORTABLE RIDE



Rigid Tire Shoulder



The innovative extension of the tire shoulder to the sidewall tread block design can easily cope with various harsh road conditions and effectively improve the ability of the tire to resist external impact and damage.

Durable Compound

Natural rubber, high-strength polymers, and wear-resistant materials helps achieve cut and crack resistance on unpaved gravel roads.



Stone Ejection Design



The stepped tread groove design, combined with the tear-resistant formula, can effectively eject small stones when driving at high speed, keeping the tread clean and efficient, and preventing damage to the tire caused by foreign objects.

VALIANT AT

Durable & Resilient | Providing a Comfortable Ride

Whether it's deep snow or muddy dirt country roads

Whether it's rugged mountains or slippery highways

VALIANT AT all-terrain tires let you handle different road surfaces with ease

Enjoy a safe and comfortable driving experience.

Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
235/75R15	109	SXL	9.1	235	6 1/2J	733	660AA	1030	2271	340	50
31X10.50R15LT 6PR	109	S	10.6	268	8 1/2J	775		1030	2270	350	50
235/70R16	106	T	9.1	240	7J	736	660AA	950	2094	300	44
255/70R16	111	S	9.1	260	7 1/2J	764	660AA	1090	2403	300	44
265/70R16	112	T	9.1	272	8J	778	660AA	1120	2469	300	44
265/75R16	116	S	9.1	267	7 1/2J	804	660AA	1250	2756	300	44
275/70R16	114	S	9.1	279	8J	792	660AA	1180	2601	300	44
LT225/75R16 10PR	115/112	Q	10.6	223	6J	744		1215/1120	2680/2470	550	80
LT265/70R16 10PR	121/118	S	11	272	8J	778		1450/1320	3195/2910	550	80
LT265/75R16 10PR	123/120	R	11	267	7 1/2J	804		1550/1400	3415/3085	550	80
LT285/75R16 10PR	126/123	R	11	286	8J	834		1700/1550	3750/3415	550	80
245/65R17	111	TXL	9.1	248	7J	750	660AA	1090	2403	340	50
265/65R17	112	T	9.1	272	8J	776	660AA	1120	2469	300	44
265/70R17	115	T	9.1	272	8J	804	660AA	1215	2679	300	44
275/65R17	115	T	9.1	279	8J	790	660AA	1215	2679	300	44
285/65R17	116	T	9.1	292	8 1/2J	802	660AA	1250	2756	300	44
LT235/80R17 10PR	120/117	S	10.6	235	6 1/2J	808		1400/1285	3085/2835	550	80
LT245/75R17 10PR	121/118	S	10.6	248	7J	800		1450/1320	3195/2910	550	80
LT265/70R17 10PR	123/120	S	11	272	8J	804		1550/1400	3415/3085	550	80
LT285/70R17 10PR	121/118	R	11	292	8 1/2J	832		1450/1320	3195/2910	550	80
255/50R18	106	HXL	9.1	265	8J	713	660AA	950	2094	340	50
265/40R18	101	HXL	9.1	271	9 1/2J	669	660AA	825	1819	340	50
275/65R18	116	T	9.1	279	8J	815	660AA	1250	2756	300	44
LT275/65R18 10PR	123/120	S	11	279	8J	815		1550/1400	3415/3085	550	80
LT275/70R18 10PR	125/122	S	11	279	8J	843		1650/1500	3640/3305	550	80
275/55R20	117	TXL	9.1	284	8 1/2J	810	660AA	1285	2833	340	50
LT275/65R20 10PR	126/123	S	11	279	8J	866		1700/1550	3750/3415	550	80
285/45R22	114	HXL	9.1	285	9 1/2J	815	660AA	1180	2601	340	50




VALIANT AT

OFF-ROAD RECOVERY

Wider and deeper tread grooves improve heat dissipation, self-cleaning performance, and provide excellent grip for various complex road conditions.

The tread pattern adopts a bionic beast claw design, which allows the tire to firmly grip the ground on muddy and gravel roads, thus improving traction.

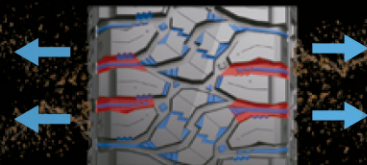

The shoulder pattern adopts mud self-cleaning technology, which automatically removes mud accumulated in the grooves when the tire rotates.



The stone-repelling groove design effectively prevents stones from embedding, thereby ensuring safe and smooth driving.

VALIANT MTX

ANTI-CUTTING | ANTI-TEAR



High-strength shoulder structure and tough polyester construction contribute to excellent handling, damage resistance, and impact resistance.

The bionic sidewall design increases strength through three-dimensional patterns and reduces damage caused by external impacts to the sidewall.

The high-toughness organic formula improves the wear resistance of the road surface while maintaining the cut and tear resistance outside the road surface.

Size	Loading Index	Speed Rating	Tread Depth (mm)	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load LBS	MAX Pressure Kpa	MAX Pressure Psi
31X10.50R15LT 6PR	109	Q	13.2	268	8 1/2J	775	1030	2270	350	50
33X12.50R15LT 6PR	108	Q	13.2	318	10J	826	1000	2205	250	35
35X12.50R15LT 6PR	113	Q	13.2	318	10J	877	1150	2535	250	35
LT285/75R16 10PR	126/123	Q	13.2	286	8J	834	1700/1550	3750/3415	550	80
LT315/75R16 10PR	127/124	Q	13.2	313	8 1/2J	878	1750/1600	3860/3525	450	65
33X12.50R17LT 10PR	120	Q	14.4	318	10J	826	1400	3085	450	65
35X12.50R17LT 10PR	121	Q	14.4	318	10J	877	1450	3195	450	65
LT285/70R17 10PR	126/123	Q	13.2	292	8 1/2J	832	1700/1550	3750/3415	550	80
LT275/70R18 10PR	125/122	R	14.4	279	8J	843	1650/1500	3640/3305	550	80
33X12.50R18LT 10PR	118	Q	14.4	318	10J	826	1320	2910	450	65
35X12.50R18LT 10PR	123	Q	14.4	318	10J	877	1550	3415	450	65
LT285/55R20 10PR	122/119	Q	13.2	297	9J	822	1500/1360	3305/3000	550	80
33X12.50R20LT 10PR	114	Q	14.4	318	10J	826	1180	2600	450	65
35X12.50R20LT 10PR	121	Q	14.4	318	10J	877	1450	3195	450	65
37X13.50R20LT 10PR	127	Q	14.4	345	11J	928	1750	3860	450	65
33X12.50R22LT 10PR	109	Q	14.4	318	10J	826	1030	2270	450	65
35X12.50R22LT 10PR	117	Q	14.4	318	10J	877	1285	2835	450	65
37X13.50R22LT 10PR	123	Q	14.4	345	11J	928	1550	3415	450	65
37X13.50R24LT 10PR	120	Q	14.4	345	11J	928	1400	3085	450	65





VALIANT MTX