



NOVAMAXX TIRE CATALOGUE

2024 VERSION

Tire Direct
La nueva generación



TIRE DIRECT



/TIRE_DIRECT



/TIREDIRECTMX



TIRE DIRECT



Tire Direct
La nueva generación

**TBR
PRODUCT**



NMX82

Drive

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-16PR	146/143L	268	8.25	3000	2750	830
11R24.5-16PR	149/146L	268	8.25	3250	3000	830



**NMX13/
NMX13+**

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-16PR	146/143M	268	8.25	3000	2750	830
11R24.5-16PR	149/146M	268	8.25	3250	3000	830
11R22.5-18PR	149/146L	279	8.25	3250	3000	930
11R24.5-18PR	152/149M	279	8.25	3250	3000	830
315/80R22.5-20PR	157/154L	312	9.00	4125	3750	900



NMX82+

Drive

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
295/75R22.5-16PR	146/143L	268	8.25	3000	2750	830



SPECIAL NMX84

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-16PR	146/143M	268	8.25	3000	2750	830
11R24.5-16PR	149/146M	268	8.25	3250	3000	830




SPECIAL NMX82+

Drive

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-18PR	149/146K	279	8.25	3250	3000	930
11R24.5-18PR	152/149K	279	8.25	3250	3000	830

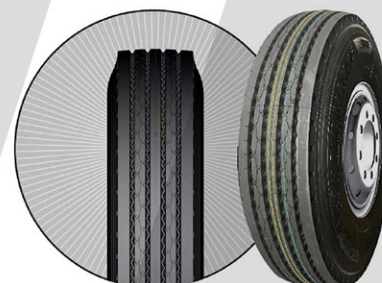

SPECIAL NMX84+

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-18PR	148/145M	268	8.25	3150	2900	850



NMX90

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-16PR	146/143J	279	8.25	3000	2750	830
11R24.5-16PR	149/146J	279	8.25	3250	3000	830



NMX17

Drive

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
315/80R22.5-20PR	156/150M	312	9.00	4000	3350	850



NMX51

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-16PR	146/143M	268	8.25	3000	2750	830
11R24.5-16PR	149/146M	268	8.25	3250	3000	830
295/75R22.5-16PR	146/143M	268	8.25	3000	2750	830



NMX51+

All Position

Recommended



SIZE	Li&SR	Section Depth (mm)	Standard Rim	Load(kg) Single	Load(kg) Dual	Pressure (Kpa)
11R22.5-18PR	149/146L	279	8.25	3250	3000	930
11R24.5-18PR	152/149M	279	8.25	3250	3000	830



**PCR
PRODUCT**



Chlvalrous NX001



Recommended



Swordsman NX005



Recommended



NO	SIZE	LI	SS	MAX.LOAD		MAX. PRESS	
				KG	LBS	KPa	PSI
1	175/65R14	82	T	475	1047	300	44
2	185/70R14	88	T	560	1235	300	44
3	195/50R15	82	V	475	1047	300	44
4	185/60R15	84	H	500	1102	300	44
5	195/60R15	88	T	560	1235	300	44
6	185/65R15	88	H	560	1235	300	44
7	195/65R15	91	H	615	1356	300	44
8	195/55R16	87	H	545	1202	300	44
9	205/55R16	91	V	615	1356	300	44
10	205/60R16	92	V	630	1389	300	44

NO	SIZE	LI	SS	MAX.LOAD		MAX. PRESS	
				KG	LBS	KPa	PSI
1	175/70R13	82	S	437	963	300	44
2	185/65R14	86	T	530	1168	300	44
3	185/65R15	88	H	560	1235	300	44
4	175/65R14	82	T	475	1047	300	44
5	195/60R15	88	T	560	1235	300	44
6	195/65R15	91	H	615	1356	300	44
7	205/55R16	91	V	615	1356	300	44
8	165/65R13	77	T	412	908	300	44
9	185/70R13	86	T	530	1168	300	44
10	175/70R14	88	T	560	1235	300	44
11	185/60R14	82	T	475	1047	300	44
12	185/70R14	88	T	560	1235	300	44
13	205/65R16	95	H	690	1521	300	44
14	205/70R15	96	T	710	1565	300	44
15	205/60R16	92	V	630	1389	300	44
16	215/60R16	95	V	775	1709	300	44

WARRIOR TERRA M/T



Handling



Longer mileage



Wild road



Wet Traction

NO	SIZE	LI/SS	PR	SIDE WALL	MAX.LOAD		MAX. PRESS		M+S
					KG	LBS	KPa	PSI	
1	31*10.5R15LT	109Q		RWL	1030	2270	350	50	M+S
2	LT235/75R15	104/101Q	8PR	RWL	900/825	1985/1820	350	50	M+S
3	LT265/75R16	123/120S	10PR	RWL	1550/1400	3415/3085	550	80	M+S
4	33*12.5R18LT	118Q	10PR	RWL	1320	2910	450	65	M+S
5	33*12.5R20LT	119Q	12PR	RWL	1360	3085	550	80	M+S
6	33*12.5R22LT	114Q	12PR	RWL	1180	2600	550	80	M+S
7	LT245/75R16	120/116Q	10PR	RWL	1380/1260	3036/2772	550	80	M+S ☆
8	LT265/70R17	121/118S	10PR	RWL	1450/1320	3195/2910	550	80	M+S ☆
9	LT285/75R16	126/123Q	10PR	RWL	1700/1550	3748/3417	550	80	M+S ☆
10	LT285/70R17	121/118S	8PR	RWL	1450/1320	3197/2910	550	80	M+S ☆

☆ Develop in 2024

WARRIOR TERRA T/A



Handling



Longer mileage



Silence



Comfort



Wet Traction

NO	SIZE	LI/SS	PR	SIDE WALL	MAX. LOAD		MAX. PRESS		UTQG			M+S
					KG	LBS	KPa	PSI	T1	T2	T3	
1	175/80R14	92T XL		RWL	560	1234	290	50	400	A	A	M+S
2	P235/75R15	109T XL		RWL	1030	2271	340	50	400	A	A	M+S
3	275/60R15	107T		RWL	975	2149	300	44	400	A	A	M+S
4	P235/70R16	106T		RWL	950	2094	300	44	400	A	A	M+S
5	P245/70R16	111T XL		RWL	1090	2403	340	50	400	A	A	M+S
6	265/70R16	112T		RWL	1120	2469	300	44	400	A	A	M+S
7	P265/75R16	116S		RWL	1250	2756	300	44	400	A	A	M+S
8	225/65R17	102T		RWL	950	2094	340	50	400	A	A	M+S
9	245/65R17	111T XL		RWL	975	2149	340	50	400	A	A	M+S
10	265/65R17	112T		RWL	1120	2469	300	44	400	A	A	M+S
11	P265/70R17	115S		RWL	1215	2679	300	44	400	A	A	M+S
12	265/60R18	110T		RWL	1060	2337	300	44	400	A	A	M+S
13	275/65R18	116T XL		RWL	1250	2756	340	50	400	A	A	M+S
14	265/50R20	111T XL		RWL	1090	2403	340	50	400	A	A	M+S
15	275/55R20	117T XL		RWL	1285	2833	340	50	400	A	A	M+S
16	27*8.5R14LT	95Q	6PR	RWL	690	1521	350	50				M+S
17	31*10.5R15LT	109Q	8PR	RWL	1030	2270	350	50				M+S
18	LT235/75R15	104/101S	8PR	RWL	900/825	1985/1820	350	50				M+S
19	255/70R15C	107/103T	6PR	RWL	975/875	2149/1928	350	50				M+S
20	LT245/75R16	120/116S	10PR	RWL	1400/1250	3085/2755	550	80				M+S
21	LT265/75R16	123/120S	10PR	RWL	1550/1400	3415/3085	550	80				M+S
22	LT235/80R17	120/117R	10PR	RWL	1400/1250	3085/2755	550	80				M+S
23	LT265/70R17	121/118S	10PR	RWL	1450/1320	3195/2910	550	80				M+S
24	P255/70R16	111T		RWL	1090	2403	300	44	400	A	A	M+S ☆
25	225/60R18	100T		RWL	800	1764	300	44	400	A	A	M+S ☆
26	265/65R18	114H		RWL	1180	2601	300	44	400	A	A	M+S ☆
27	285/60R18	116H		RWL	1250	2756	300	44	400	A	A	M+S ☆
28	255/55R19	111T XL		RWL	1090	2403	340	50	400	A	A	M+S ☆
29	285/50R20	112T XL		RWL	1250	2756	340	50	400	A	A	M+S ☆
30	LT285/70R17	121/118S	10PR	RWL	1450/1320	3195/2910	550	80				M+S ☆
31	LT315/70R17	121/118S	10PR	RWL	1450/1320	3195/2910	550	80				M+S ☆
32	33*12.50R18LT	118Q	10PR	RWL	1320	2910	450	80				M+S ☆
33	33*12.50R20LT	114Q	10PR	RWL	1180	2602	450	80				M+S ☆
34	33*12.50R22LT	109Q	10PR	RWL	1180	2602	450	80				M+S ☆

☆ Develop in 2024

Tire Direct
La nueva generación

UHP Amanner NX007



Economy



Longer mileage



Silence



Comfort



Wet Traction

NO	SIZE	LI	SS	Extra Load	MAX. LOAD		MAX. PRESS		
					KG	LBS	KPa	PSI	
1	215/45ZR17	91	W	XL	615	1356	340	50	☆
2	215/50R17	95	V	XL	690	1521	340	50	☆
3	215/55R17	98	W	XL	750	1653	340	50	☆
4	225/45R17	94	W	XL	670	1477	340	50	☆
5	225/50R17	98	W	XL	750	1653	340	50	☆
6	225/55R17	97	W	XL	730	1609	340	50	☆
7	225/65R17	102	H		850	1874	300	44	☆
8	235/55R17	103	V	XL	875	1929	340	50	☆
9	245/45R17	99	W	XL	775	1709	340	50	☆
10	225/40R18	92	W	XL	630	1389	340	50	☆
11	225/45R18	95	W	XL	690	1521	340	50	☆
12	225/50R18	99	W	XL	775	1709	340	50	☆
13	225/55R18	102	V		850	1874	300	44	☆
14	235/45R18	98	W	XL	750	1653	340	50	☆
15	245/45R18	96	W	XL	710	1565	340	50	☆
16	245/50R18	104	W	XL	900	1984	340	50	☆
17	255/45R18	103	W	XL	875	1929	340	50	☆
18	265/60R18	110	V		1060	2337	300	44	☆
19	265/65R18	114	H		1180	2601	300	44	☆
20	285/60R18	116	H		1250	2756	300	44	☆
21	225/45R19	96	W	XL	710	1565	340	50	☆
22	235/35R19	91	W	XL	615	1356	340	50	☆
23	235/40R19	96	W	XL	710	1565	340	50	☆
24	235/55R19	101	V		825	1819	300	44	☆
25	245/40R19	94	W		670	1477	300	44	☆
26	245/45R19	102	W	XL	850	1874	340	50	☆
27	275/35R19	100	W	XL	800	1764	340	50	☆
28	235/55R20	105	W	XL	925	2039	340	50	☆
29	245/40R20	99	W	XL	775	1709	340	50	☆
30	245/45R20	103	W	XL	875	1929	340	50	☆
31	255/40R20	101	W	XL	825	1819	340	50	☆
32	255/45R20	105	W	XL	925	2039	340	50	☆
33	265/50R20	107	W	XL	975	2149	340	50	☆
34	275/35R20	102	W	XL	850	1874	340	50	☆
35	285/35R20	104	W	XL	900	1984	340	50	☆
36	285/50R20	116	W	XL	1250	2756	340	50	☆
37	295/35R20	105	W	XL	925	2039	340	50	☆
38	315/35R20	110	W	XL	1060	2337	340	50	☆
39	275/40R21	107	Y	XL	975	2149	340	50	☆
40	275/45R21	110	W	XL	1060	2337	340	50	☆
41	275/35R21	103	Y	XL	875	1929	340	50	☆
42	285/40R21	109	Y	XL	1030	2271	340	50	☆
43	295/35R21	107	W	XL	975	2149	340	50	☆
44	315/35R21	111	Y	XL	1090	2403	340	50	☆
45	275/40R22	107	W	XL	975	2149	340	50	☆
46	285/45R22	114	W	XL	1180	2601	340	50	☆
47	285/40R22	110	W	XL	1060	2337	340	50	☆
48	295/40R22	112	Y	XL	1120	2469	340	50	☆
49	325/35R22	114	Y	XL	1180	2601	340	50	☆

☆ Develop in 2024

Tire Direct
La nueva generación