



PEGASUS

Tire Direct 
La nueva generación

www.tiredirect.com.mx



TIRE DIRECT



/TIRE_DIRECT



/TIREDIRECTMX



TIRE DIRECT



PEGASUS

PVLTR

2025 GLOBAL

PCR / SUV / 4x4 / IRT

Tire Direct 
La nueva generación

Tire Direct
La nueva generación

ADVANCE ENHANCE

01



PEGASUS RTX

02



PEGASUS MTX

03



PEGASUS TOUR AS

04



PEGASUS ATX 4S

05



HPS SPORT AS

06



PEGASUS HTX AS

PEGASUS RTX

Tire Direct
La nueva generación

Deep-Tread Traction Smooth Off-Road Performance

- Carrying Off-Road Passion.
- Empowering Fearless Journeys.
- Forging Quality Legends.



Traction:

Large, angular tread blocks enhance surface engagement, delivering excavator-like grip on muddy/rocky paths. Minimizes slippage during ascents or ditch crossings with boulder-like steadiness.



Durability:

Reinforced tread blocks with rugged rubber resist stone punctures and road abrasion. Withstands extended off-road use and sharp object impacts—maintaining tread integrity without deformation or peeling for significantly extended lifespan.



Self-Cleaning Performance

Crisscrossing deep grooves serve as "mud/water ejection channels." While driving, they rapidly expel embedded debris and trapped water—preventing slippage caused by foreign matter buildup. This self-cleaning design maintains consistent tread grip, empowering vehicles to conquer muddy wetlands and water crossings.



Traction Performance

Oversized, irregularly arranged tread blocks function like "steel claws" that dig into mud and gravel, maximizing ground friction. This unique pattern enhances both vertical grip during steep climbs and lateral adhesion during turns—delivering rock-solid stability across challenging terrains.

PEGASUS RTX

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
37x13.50R24LT	12PR	124	Q	13.1	345	11.0J	928	-	1600	3525	550	80	BSW
35x12.50R24LT	12PR	116	Q	13.1	316	10.5J	877	-	1250	2755	550	80	BSW
33x12.50R24LT	12PR	106	Q	13.1	320	11.5J	826	-	950	2095	550	80	BSW
37x13.50R22LT	12PR	128	Q	13.1	345	11.0J	928	-	1800	3970	550	80	BSW
35x12.50R22LT	12PR	121	Q	13.1	318	10.0J	877	-	1450	3195	550	80	BSW
33x12.50R22LT	12PR	114	Q	13.1	318	10.0J	826	-	1180	2600	550	80	BSW
37x13.50R20LT	12PR	128	Q	13.1	345	11.0J	928	-	1800	3970	550	80	BSW
35x12.50R20LT	12PR	125	Q	13.1	318	10.0J	877	-	1650	3640	550	80	BSW
33x12.50R20LT	12PR	119	Q	13.1	318	10.0J	826	-	1360	3000	550	80	BSW
33x11.50R20LT	10PR	118	Q	13.1	290	9.0J	826	-	1320	2910	550	80	BSW
LT305/55R20	12PR	125/122	S	11	316	9.5J	844	-	1650/1600	3640/3305	550	80	BSW
LT285/65R20	10PR	127/124	Q	11	292	8.5J	878	-	1750/1600	3860/3525	550	80	BSW
LT285/55R20	10PR	122/119	S	11	297	9.0J	822	-	1500/1360	3305/3000	550	80	BSW
LT275/65R20	10PR	126/123	R	11	279	8.0J	866	-	1700/1550	3750/3415	550	80	BSW
LT275/55R20	10PR	120/117	Q	11	284	8.5J	810	-	1400/1285	3085/2835	550	80	BSW
LT265/60R20	10PR	121/118	Q	11	272	8.0J	826	-	1450/1320	3195/2910	550	80	BSW
35x12.50R18LT	12PR	128	Q	13.1	318	10.0J	877	-	1800	3970	550	80	BSW
33x12.50R18LT	12PR	122	Q	13.1	318	10.0J	826	-	1500	3305	550	80	BSW
LT275/70R18	12PR	128/125	Q	11	279	8.0J	843	-	1800/1650	3970/3640	650	95	BSW
LT275/65R18	10PR	123/120	Q	11	279	8.0J	815	-	1650/1400	3415/3085	550	80	BSW
37x12.50R17LT	8PR	124	Q	13.1	318	10.0J	928	-	1600	3525	350	50	BSW
35x12.50R17LT	10PR	125	Q	13.1	318	10.0J	877	-	1650	3640	450	65	BSW
33x12.50R17LT	10PR	120	Q	13.1	318	10.0J	826	-	1400	3085	450	65	BSW
LT285/70R17	10PR	126/123	Q	11	292	8.5J	832	-	1700/1550	3750/3415	550	80	BSW
LT265/70R17	10PR	123/120	Q	11	272	8.0J	804	-	1650/1400	3415/3085	550	80	BSW
LT245/75R17	10PR	121/118	Q	11	248	7.0J	800	-	1450/1320	3195/2910	550	80	BSW
LT285/75R16	10PR	126/123	S	11	286	8.0J	834	-	1700/1550	3750/3415	550	80	BSW
LT265/75R16	10PR	123/120	R	11	267	7.5J	804	-	1650/1400	3415/3085	550	80	BSW
31x10.50R15LT	6PR	109	S	11	268	8.5J	775	-	1030	2270	350	50	BSW



TRACTION PERFORMANCE



HANDLING PERFORMANCE



DRAINAGE PERFORMANCE



COMFORTABLE



QUIET PERFORMANCE



PUNCTURE RESISTANCE



O F F - R O A D R E C O V E R

PEGASUS MTX



PEGASUS MTX tread pattern can be called a "precision weapon" for off-road performance. The large, interlaced tread blocks are like steel armor, and together with the deep groove design, they can break through resistance like a plow on muddy roads and firmly grip the ground.




A TOUGH TREAD

Gripping like an anchor—fearless in off-road challenges!



Gripping ability

The shape of the tread blocks imitates the form of eagle claws, with sharp edges full of tension. When the tire touches the ground, it grips precisely and powerfully like an eagle's claw, deeply embedding into various complex terrains and providing strong adhesion.



Drainage performance

The deep grooves between the tread patterns are the main force for obstacle clearance. With their considerable depth and reasonable spacing design, they can quickly expel accumulated water, mud, and gravel between the tread and the ground. This prevents a reduction in grip caused by the accumulation of foreign objects, ensuring that the tire maintains effective contact with the ground at all times on muddy and wading roads—truly deserving the name "automatic cleaning channels."



Bionic design

The sidewall pattern adopts a bionic design, with block-shaped patterns and sharp edges, resembling the shape of eagle claws. This signifies that it can possess extremely strong grip like eagle claws. The wide drainage grooves and pattern blocks can enhance the vehicle's ability to get out of trouble when the tires are stuck.




Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
37x13.50R24LT	12PR	124	Q	14.4	345	11.0J	928	-	1600	3525	550	80	BSW
35x12.50R24LT	12PR	116	Q	14.4	316	10.5J	877	-	1250	2755	550	80	BSW
33x12.50R24LT	12PR	106	Q	14.4	320	11.5J	826	-	950	2095	550	80	BSW
40x15.50R22LT	12PR	128	Q	14.4	395	12.5J	1004	-	1800	3970	550	80	BSW
37x13.50R22LT	12PR	128	Q	14.4	345	11.0J	928	-	1800	3970	550	80	BSW
35x12.50R22LT	12PR	121	Q	14.4	318	10.0J	877	-	1450	3195	550	80	BSW
33x12.50R22LT	12PR	114	Q	14.4	318	10.0J	826	-	1180	2600	550	80	BSW
40x15.50R20LT	12PR	128	Q	14.4	395	12.5J	1004	-	1800	3970	550	80	BSW
37x13.50R20LT	12PR	128	Q	14.4	345	11.0J	928	-	1800	3970	550	80	BSW
35x12.50R20LT	12PR	125	Q	14.4	318	10.0J	877	-	1650	3640	550	80	BSW
33x12.50R20LT	12PR	119	Q	14.4	318	10.0J	826	-	1360	3000	550	80	BSW
LT285/55R20	10PR	122/119	Q	13.2	297	9.0J	822	-	1500/1360	3305/3000	550	80	BSW
LT275/55R20	10PR	120/117	Q	13.2	284	8.5J	810	-	1400/1285	3085/2835	550	80	BSW
35x12.50R18LT	12PR	128	Q	14.4	318	10.0J	877	-	1800	3970	550	80	BSW
33x12.50R18LT	12PR	122	Q	14.4	318	10.0J	826	-	1500	3305	550	80	BSW
LT285/65R18	10PR	125/122	Q	13.2	292	8.5J	827	-	1650/1500	3640/3305	550	80	BSW
LT275/70R18	10PR	125/122	Q	14.4	279	8.0J	843	-	1650/1500	3640/3305	550	80	BSW
LT275/65R18	10PR	123/120	Q	13.2	279	8.0J	815	-	1550/1400	3415/3085	550	80	BSW
35x12.50R17LT	10PR	125	Q	14.4	318	10.0J	877	-	1650	3640	450	65	BSW
33x12.50R17LT	10PR	120	Q	14.4	318	10.0J	826	-	1400	3085	450	65	BSW
LT285/70R17	10PR	126/123	Q	13.2	292	8.5J	832	-	1700/1550	3750/3415	550	80	BSW
LT265/70R17	10PR	123/120	Q	13.2	272	8.0J	804	-	1550/1400	3415/3085	550	80	BSW
LT315/75R16	10PR	127/124	Q	13.2	313	8.5J	878	-	1750/1600	3860/3525	450	65	BSW
LT285/75R16	10PR	126/123	Q	13.2	286	8.0J	834	-	1700/1550	3750/3415	550	80	BSW
LT265/75R16	10PR	123/120	Q	13.2	267	7.5J	804	-	1550/1400	3415/3085	550	80	BSW
LT245/75R16	10PR	120/116	Q	12	248	7.0J	774	-	1400/1250	3085/2755	550	80	BSW
LT235/85R16	10PR	120/116	Q	12	235	6.5J	806	-	1400/1250	3085/2755	550	80	BSW
35x12.50R15LT	6PR	113	Q	13.2	318	10.0J	877	-	1150	2535	250	35	BSW
33x12.50R15LT	6PR	108	Q	13.2	318	10.0J	826	-	1000	2205	250	35	BSW
31x10.50R15LT	6PR	109	Q	13.2	268	8.5J	775	-	1030	2270	350	50	BSW

TOUR AS

Enjoy the thrill of high-performance driving
without the hassle of seasonal tire swaps

It Provides exceptional convenience for users who don't want to store multiple sets of tires or live in the regions which infrequent and mild snowfall.

Wet & All-Weather Capability:



Excellent wetland grip: High-performance formula of rubber and improve design of tread expels accumulated water effectively, reduce the risk of slip on the water and shortens braking distance.

Wide temperature adaptability: The rubber formula can maintain flexibility and grip within a relatively wide temperature range.

Dry Performance & Handling :



Strong grip: Providing grip performance near Summer tires on the dry road makes drivers feel enough confidence.

High-speed stability: Improving the structure of carcass guarantees driving stability and feeling of control.

Enhanced Safety:



Shorter braking distance & Adapt to various weather conditions
Whether on dry or wet surfaces, it offers a shorter braking distance than ordinary tires.



Uncompromising performance and convenience



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
235/60R18	-	107	V	7.5	235	7.0J	739	560AA	975	2149	340	50	BSW
225/60R18	-	100	V	7.5	225	6.5J	727	560AA	800	1764	300	44	BSW
235/65R17	-	104	H	7.5	235	7.0J	738	560AA	900	1984	300	44	BSW
225/65R17	-	102	H	7.5	225	6.5J	724	560AA	850	1874	300	44	BSW
225/60R17	-	99	V	7.5	225	6.5J	702	560AA	775	1709	300	44	BSW
215/65R17	-	99	H	7.5	215	6.5J	712	560AA	775	1709	300	44	BSW
215/60R17	-	96	V	7.5	215	6.5J	690	560AA	710	1565	300	44	BSW
235/60R16	-	100	V	7.5	235	7.0J	688	560AA	800	1764	300	44	BSW
225/65R16	-	100	H	7.5	225	6.5J	698	560AA	800	1764	300	44	BSW
225/60R16	-	98	V	7.5	225	6.5J	676	560AA	750	1653	300	44	BSW
215/65R16	-	98	H	7.5	215	6.5J	686	560AA	750	1653	300	44	BSW
215/60R16	-	95	H	7.5	215	6.5J	664	560AA	690	1521	300	44	BSW
215/55ZR16	-	97	W	7.5	215	7.0J	642	560AA	730	1609	340	50	BSW
205/65R16	-	95	H	7.5	205	6.0J	672	560AA	690	1521	300	44	BSW
205/60R16	-	92	V	7.5	205	6.0J	652	560AA	630	1389	300	44	BSW
205/55R16	-	91	V	7.5	205	6.5J	632	560AA	615	1356	300	44	BSW
195/55R16	-	87	V	7.5	195	6.0J	620	560AA	545	1201	300	44	BSW
215/70R15	-	98	H	7.5	215	6.5J	683	560AA	750	1653	300	44	BSW
215/70R15	-	98	T	7.5	215	6.5J	683	560AA	750	1653	300	44	BSW
205/70R15	-	96	H	7.5	205	6.0J	669	560AA	710	1565	300	44	BSW
205/65R15	-	94	H	7.5	205	6.0J	647	560AA	670	1477	300	44	BSW
205/60R15	-	91	V	7.5	205	6.0J	627	560AA	615	1356	300	44	BSW
195/65R15	-	91	V	7.5	195	6.0J	635	560AA	615	1356	300	44	BSW
195/60R15	-	88	V	7.5	195	6.0J	615	560AA	560	1235	300	44	BSW
195/55R15	-	85	V	7.5	195	6.0J	595	560AA	515	1135	300	44	BSW
195/50R15	-	82	V	7.5	195	6.0J	577	560AA	475	1047	300	44	BSW
185/65R15	-	88	H	7.2	185	5.5J	621	560AA	560	1235	300	44	BSW
185/60R15	-	88	H	7.2	185	5.5J	603	560AA	560	1235	340	50	BSW
185/55R15	-	82	V	7.2	185	6.0J	585	560AA	475	1047	300	44	BSW
215/70R14	-	96	H	7.5	215	6.5J	658	560AA	710	1565	300	44	BSW
205/70R14	-	95	H	7.5	205	6.0J	644	560AA	690	1521	300	44	BSW
195/70R14	-	91	T	7.5	195	6.0J	630	560AA	615	1356	300	44	BSW
195/60R14	-	86	H	7.5	195	6.0J	590	560AA	530	1168	300	44	BSW
185/70R14	-	88	H	7	185	5.5J	616	560AA	560	1235	300	44	BSW
185/65R14	-	86	H	7	185	5.5J	596	560AA	530	1168	300	44	BSW
185/60R14	-	82	H	7	185	5.5J	578	560AA	475	1047	300	44	BSW
175/70R14	-	84	T	7	175	5.0J	602	560AA	500	1102	300	44	BSW
175/65R14	-	86	T	7	175	5.0J	584	560AA	530	1168	340	50	BSW
165/70R14	-	81	H	7	165	5.0J	588	560AA	462	1019	300	44	BSW
165/65R14	-	79	H	7	165	5.0J	570	560AA	437	963	300	44	BSW
165/60R14	-	75	H	7	165	5.0J	554	560AA	387	853	300	44	BSW
185/70R13	-	86	T	7	185	5.5J	590	560AA	530	1168	300	44	BSW
175/70R13	-	82	H	7	175	5.0J	576	560AA	475	1047	300	44	BSW
165/70R13	-	79	T	7	165	5.0J	562	560AA	437	963	300	44	BSW



PEGASUS ATX 4S

The perfect companion for urban commuting and wilderness adventures.



PEGASUS ATX 4S Tires are born for the journey, serving as a steadfast companion for SUV owners, pickup truck drivers, off-road enthusiasts, camping/outdoor adventurers, and long-distance travelers in their pursuit of boundless freedom. A durable and long-lasting tire is indispensable.

PEGASUS ATX 4S conquers not just the land, but also dreams and the vast sea of stars.

7



P E G A S U S

Tire Direct

La nueva generación

A T X 4 S



Meticulously crafted, only for multi-faceted mastery



Wide grooves:
Emphasize the rapid capacity for sludge, water and snow drainage, and prevent anti-slip

Interlaced/block patterns:
Emphasize providing multi-directional grip, especially in soft road surface.

Shoulder tread block:
Emphasizes providing additional transverse space on muddy ground and slopes towards grip and support.

Tough body, fearless of challenges



Enhanced sidewall/crown: Emphasizes thicker rubber and reinforced cord fabric layer the anti-cut design can resist damage from crushed stones, branches and sharp objects

Deeper tread patterns & larger tread blocks:
They provide strong traction at the same time, it also means a longer wear life

Full road condition control, safety always by your side



It provides stronger grip on unpaved roads and reduces skidding and getting stuck risk.

It provides excellent traction and braking performance on rainy, snowy and slippery roads a sturdy tire body reduces the risk of a blowout and enhances driving safety.



Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
35x12.50R20LT	12PR	125	R	11.5	317.5	10.0J	877	-	1650	3640	550	80	BSW
33x12.50R20LT	12PR	119	S	11.5	317.5	10.0J	826	-	1360	3000	550	80	BSW
LT305/55R20	10PR	121/118	S	11.5	305	9.5J	844	-	1450/1320	3195/2910	450	65	BSW
LT285/55R20	10PR	122/119	T	11	285	9.0J	822	-	1500/1360	3305/3000	550	80	BSW
LT275/65R20	10PR	126/123	S	11	275	8.0J	866	-	1700/1550	3750/3415	550	80	BSW
LT275/60R20	10PR	123/120	S	11	275	8.0J	838	-	1550/1400	3415/3085	550	80	BSW
275/60R20	-	116	T	9.1	275	8.0J	838	560AA	1250	2756	340	50	BSW
LT275/55R20	10PR	120/117	S	11	275	8.5J	810	-	1400/1285	3085/2835	550	80	BSW
275/55R20	-	117	T	9.1	275	8.5J	810	560AA	1285	2833	340	50	BSW
LT265/60R20	10PR	121/118	S	11	265	8.0J	826	-	1450/1320	3195/2910	550	80	BSW
265/50R20	-	111	T	9.1	265	8.5J	774	560AA	1090	2403	340	50	BSW
35x12.50R18LT	10PR	123	R	11.5	317.5	10.0J	877	-	1550	3415	450	65	BSW
33x12.50R18LT	10PR	118	R	11.5	317.5	10.0J	826	-	1320	2910	450	65	BSW
LT285/65R18	10PR	125/122	S	11	285	8.5J	827	-	1650/1500	3640/3305	550	80	BSW
LT275/70R18	10PR	125/122	S	11	275	8.0J	843	-	1650/1500	3640/3305	550	80	BSW
LT275/65R18	10PR	123/120	S	11	275	8.0J	815	-	1550/1400	3415/3085	550	80	BSW
275/65R18	-	116	T	9.1	275	8.0J	815	560AA	1250	2756	300	44	BSW
LT265/70R18	10PR	124/121	S	11	265	8.0J	829	-	1600/1450	3525/3195	550	80	BSW
265/60R18	-	114	T	9.1	265	8.0J	775	560AA	1180	2601	340	50	BSW
35x12.50R17LT	10PR	125	R	11.5	317.5	10.0J	877	-	1650	3640	450	65	BSW
33x12.50R17LT	10PR	120	R	11.5	317.5	10.0J	826	-	1400	3085	450	65	BSW
LT285/70R17	10PR	126/123	S	11	285	8.5J	832	-	1700/1550	3750/3415	550	80	BSW
LT265/70R17	10PR	123/120	S	11	265	8.0J	804	-	1550/1400	3415/3085	550	80	BSW
265/70R17	-	115	T	9.1	265	8.0J	804	560AA	1215	2679	300	44	BSW
265/65R17	-	112	T	9.1	265	8.0J	776	660AA	1120	2469	300	44	BSW
LT245/75R17	10PR	121/118	S	10.6	245	7.0J	800	-	1450/1320	3195/2910	550	80	BSW
LT245/70R17	10PR	119/116	S	10.6	245	7.0J	776	-	1360/1250	3000/2755	550	80	BSW
245/65R17	-	107	T	9.1	245	7.0J	750	560AA	975	2149	300	44	BSW
LT235/80R17	10PR	120/117	S	10.6	235	6.5J	808	-	1400/1285	3085/2835	550	80	BSW
LT315/75R16	10PR	127/124	S	11.5	315	8.5J	878	-	1750/1600	3860/3525	450	65	BSW
LT305/70R16	10PR	124/121	S	11.5	305	9.0J	834	-	1600/1450	3525/3195	450	65	BSW
LT285/75R16	10PR	126/123	S	11	285	8.0J	834	-	1700/1550	3750/3415	550	80	BSW
LT265/75R16	10PR	123/120	S	11	265	7.5J	804	-	1550/1400	3415/3085	550	80	BSW
LT265/70R16	10PR	121/118	S	11	265	8.0J	778	-	1450/1320	3195/2910	550	80	BSW
265/70R16	-	112	T	9.1	265	8.0J	778	560AA	1120	2469	300	44	BSW
255/70R16	-	111	S	9.1	255	7.5J	764	660AA	1090	2403	300	44	BSW
LT245/75R16	10PR	120/116	S	10.6	245	7.0J	774	-	1400/1250	3085/2755	550	80	BSW
245/75R16	-	111	T	9.1	245	7.0J	774	560AA	1090	2403	300	44	BSW
245/70R16	-	107	T	9.1	245	7.0J	750	560AA	975	2149	300	44	BSW
LT235/85R16	10PR	120/116	S	10.6	235	6.5J	806	-	1400/1250	3085/2755	550	80	BSW
235/70R16	-	106	T	9.1	235	7.0J	736	660AA	950	2094	300	44	BSW
LT225/75R16	10PR	115/112	S	10.6	225	6.0J	744	-	1215/1120	2680/2470	550	80	BSW
LT215/85R16	10PR	115/112	S	10.6	215	6.0J	772	-	1215/1120	2680/2470	550	80	BSW
215/70R16	-	100	H	9.1	215	6.5J	708	660AA	800	1764	300	44	BSW
31x10.50R15LT	6PR	109	S	10.6	266.7	8.5J	775	-	1030	2270	350	50	BSW
27x8.50R14LT	6PR	95	S	10.6	216	7.0J	674	-	690	1520	350	50	BSW
LT235/75R15	6PR	104/101	S	10.6	235	6.5J	733	-	900/825	1985/1820	350	50	BSW
235/75R15	-	109	S	9.1	235	6.5J	733	660AA	1030	2271	340	50	BSW
215/75R15	-	100	T	9.1	215	6.0J	703	660AA	800	1764	300	44	BSW

PEGASUS HPX SPORT AS

Protection through four seasons
regardless wind or rain




Gripping ice and snow in winter, mastering wet and slippery conditions in summer, stable handling performance in the whole year.

Super Performance in four seasons!




It sharply cuts through water in heavy rains, stays as steady as sharp claws on ice and snow, and exhibits strong grip when speeding on dry roads. Say goodbye to the hassle of changing tires with seasonal shifts. Whether for daily commuting or long journeys, it consistently provides consistent safety protection and calm handling, allowing you to drive without worries all year round.

HPX SPORT AS It is an ALL Season tire with an innovative tread design.



Integrating professional material technology and structural design, the tire body is strong and durable, while the tread accurately copes with changing road conditions.


Alongside freedom, gallop and pursue excellence together.

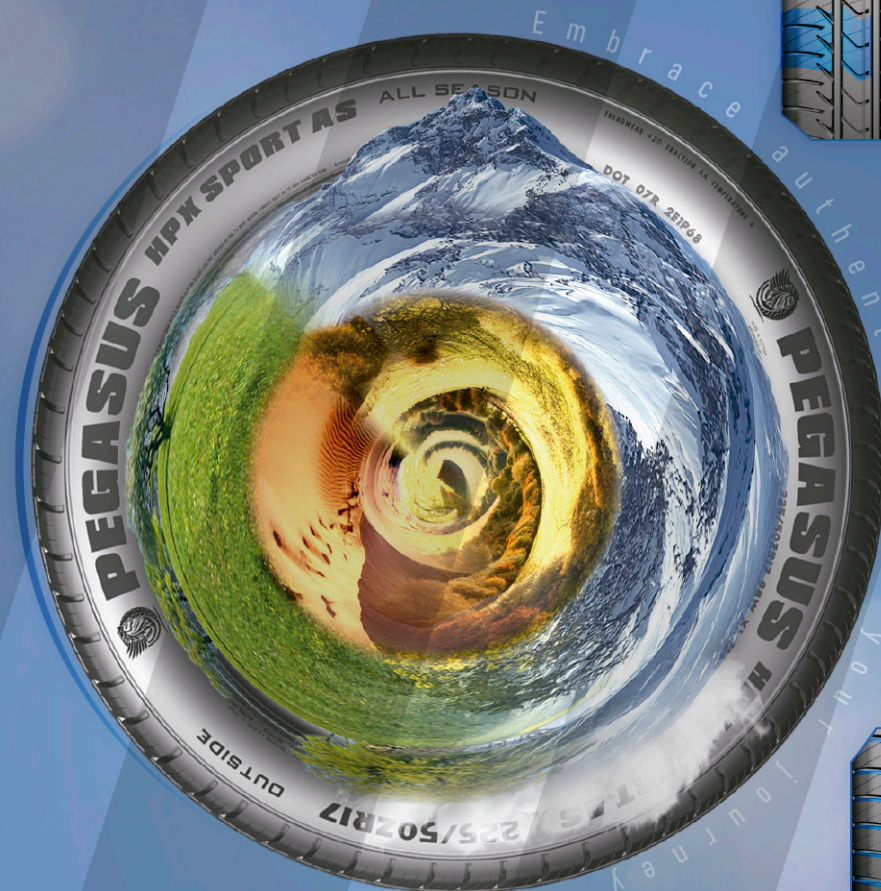

Asymmetric pattern design ensures excellent handling performance in various road conditions throughout the four seasons, and the multiple cross patterns provide strong grip.



Strong water drainage performance
Excellent wetland grip performance



Matches all-weather performance
whether in the hot summer or cold winter, you can enjoy an excellent safe driving experience.



Accelerate steering response and
improve steering performance.

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	Kg	MAX Load 1bs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
305/30ZR26	-	109	W	7.3	305	11.0J	844	420AA	1030	2271	340	50	BSW
305/35R24	-	112	V	7.3	305	11.0J	824	420AA	1120	2469	340	50	BSW
295/35ZR24	-	110	W	7.3	295	10.5J	816	420AA	1060	2337	340	50	BSW
275/25ZR24	-	96	W	7.3	275	10.0J	748	420AA	710	1565	340	50	BSW
255/30ZR24	-	97	W	7.3	255	9.0J	764	420AA	730	1609	340	50	BSW
305/45R22	-	118	V	7.3	305	10.0J	833	420AA	1320	2910	340	50	BSW
305/40R22	-	114	V	7.3	305	11.0J	803	420AA	1180	2601	340	50	BSW
285/45ZR22	-	114	W	7.3	285	9.5J	815	420AA	1180	2601	340	50	BSW
285/35ZR22	-	106	W	7.3	285	10.0J	759	420AA	950	2094	340	50	BSW
265/40ZR22	-	106	W	7.3	265	9.5J	771	420AA	950	2094	340	50	BSW
265/35ZR22	-	102	W	7.3	265	9.5J	745	420AA	850	1874	340	50	BSW
265/30ZR22	-	97	W	7.3	265	9.5J	719	420AA	730	1609	340	50	BSW
255/30ZR22	-	95	Y	7.3	255	9.0J	713	420AA	690	1521	340	50	BSW
245/30ZR22	-	92	W	7.3	245	8.5J	707	420AA	630	1389	340	50	BSW
235/30ZR22	-	90	W	7.3	235	8.5J	701	420AA	600	1323	340	50	BSW
315/35ZR20	-	110	W	7.3	315	11.0J	728	420AA	1060	2337	340	50	BSW
275/55ZR20	-	117	W	7.3	275	8.5J	810	420AA	1285	2833	340	50	BSW
275/45ZR20	-	110	W	7.3	275	9.0J	756	420AA	1060	2337	340	50	BSW
275/40ZR20	-	106	W	7.3	275	9.5J	728	420AA	950	2094	340	50	BSW
275/35ZR20	-	102	W	7.3	275	9.5J	700	420AA	850	1874	340	50	BSW
275/30ZR20	-	97	W	7.3	275	9.5J	674	420AA	730	1609	340	50	BSW
265/50ZR20	-	111	W	7.3	265	8.5J	774	420AA	1090	2403	340	50	BSW
255/50ZR20	-	109	W	7.3	255	8.0J	764	420AA	1030	2271	340	50	BSW
255/45ZR20	-	105	W	7.3	255	8.5J	738	420AA	925	2039	340	50	BSW
255/35ZR20	-	97	W	7.3	255	9.0J	686	420AA	730	1609	340	50	BSW
245/50ZR20	-	105	W	7.3	245	7.5J	754	420AA	925	2039	340	50	BSW
245/45ZR20	-	103	W	7.3	245	8.0J	728	420AA	875	1929	340	50	BSW
245/40ZR20	-	99	W	7.3	245	8.5J	704	420AA	775	1709	340	50	BSW
245/35ZR20	-	95	W	7.3	245	8.5J	680	420AA	690	1521	340	50	BSW
235/55ZR20	-	105	W	7.3	235	7.5J	766	420AA	925	2039	340	50	BSW
235/35ZR20	-	92	W	7.3	235	8.5J	672	420AA	630	1389	340	50	BSW
225/35ZR20	-	90	W	7.3	225	8.0J	666	420AA	600	1323	340	50	BSW
225/30ZR20	-	85	W	7.3	225	8.0J	644	420AA	515	1135	340	50	BSW
255/55ZR19	-	111	W	7.3	255	8.0J	763	420AA	1090	2403	340	50	BSW
255/45ZR19	-	104	W	7.3	255	8.5J	713	420AA	900	1984	340	50	BSW
255/40ZR19	-	100	W	7.3	255	9.0J	687	420AA	800	1764	340	50	BSW
255/35ZR19	-	96	W	7.3	255	9.0J	661	420AA	710	1565	340	50	BSW
245/45ZR19	-	102	W	7.3	245	8.0J	703	420AA	850	1874	340	50	BSW
245/40ZR19	-	98	W	7.3	245	8.5J	679	420AA	750	1653	340	50	BSW
235/55ZR19	-	105	W	7.3	235	7.5J	741	420AA	925	2039	340	50	BSW
235/50ZR19	-	103	W	7.3	235	7.5J	719	420AA	875	1929	340	50	BSW
235/40ZR19	-	96	W	7.3	235	8.5J	671	420AA	710	1565	340	50	BSW
235/35ZR19	-	91	W	7.3	235	8.5J	647	420AA	615	1356	340	50	BSW
225/55ZR19	-	103	W	7.3	225	7.0J	731	420AA	875	1929	340	50	BSW
225/40ZR19	-	93	W	7.3	225	8.0J	663	420AA	650	1433	340	50	BSW
255/35ZR18	-	94	W	7.3	255	9.0J	635	420AA	670	1477	340	50	BSW
245/45ZR18	-	100	W	7.3	245	8.0J	677	420AA	800	1764	340	50	BSW
245/40ZR18	-	97	W	7.3	245	8.5J	653	420AA	730	1609	340	50	BSW
235/55ZR18	-	104	W	7.3	235	7.5J	715	420AA	900	1984	340	50	BSW
235/50ZR18	-	101	W	7.3	235	7.5J	693	420AA	825	1819	340	50	BSW
235/45ZR18	-	98	W	7.3	235	8.0J	669	420AA	750	1653	340	50	BSW
225/50ZR18	-	95	W	7.3	225	8.5J	645	420AA	690	1521	340	50	BSW
225/45ZR18	-	99	W	7.3	225	7.0J	683	420AA	775	1709	340	50	BSW
225/40ZR18	-	92	W	7.3	225	8.0J	637	420AA	630	1389	340	50	BSW
215/45ZR18	-	93	W	7.3	215	7.0J	651	420AA	650	1433	340	50	BSW
215/35ZR18	-	84	W	7.3	215	7.5J	607	420AA	500	1102	340	50	BSW
245/45ZR17	-	99	W	7.3	245	8.0J	652	420AA	775	1709	340	50	BSW
245/40ZR17	-	95	W	7.3	245	8.5J	628	420AA	690	1521	340	50	BSW
235/55ZR17	-	103	W	7.3	235	7.5J	690	420AA	875	1929	340	50	BSW
235/50ZR17	-	100	W	7.3	235	7.5J	668	420AA	800	1764	340	50	BSW
235/45ZR17	-	97	W	7.3	235	8.0J	644	420AA	730	1609	340	50	BSW
225/55ZR17	-	101	W	7.3	225	7.0J	680	420AA	825	1819	340	50	BSW
225/50ZR17	-	98	W	7.3	225	7.0J	658	420AA	750	1653	340	50	BSW
225/45ZR17	-	94	W	7.3	225	7.5J	634	420AA	670	1477	340	50	BSW
215/55ZR17	-	98	W	7.3	215	7.0J	668	420AA	750	1653	340	50	BSW
215/50ZR17	-	95	W	7.3	215	7.0J	648	420AA	690	1521	340	50	BSW
215/45ZR17	-	91	W	7.3	215	7.0J	626	420AA	615	1356	340	50	BSW
205/60ZR17	-	93	W	7.3	205	6.5J	638	420AA	650	1433	340	50	BSW
205/45ZR17	-	88	W	7.3	205	7.0J	616	420AA	560	1235	340	50	BSW
205/40ZR17	-	84	W	7.3	205	7.5J	596	420AA	500	1102	340	50	BSW
205/55ZR16	-	94	W	7.3	205	6.5J	632	420AA	670	1477	340	50	BSW



HPX SPORT AS

LONG-LASTING



WET PERFORMANCE



DRAINAGE PERFORMANCE



SNOW PERFORMANCE



COMFORTABLE



HANDLING PERFORMANCE



P E G A S U S

PEGASUS HPX AS

Enjoy the driving pleasure All year round

The **HTX AS** is a meticulously designed tire that offers exceptional value for money. Whether it's the gentle spring rain, the sudden summer, downpour, the slippery autumn frost, or the long winter snow - covered roads, this tire is unfazed by the changing climate, giving drivers the confidence to conquer every mile.



COMFORTABLE



4 SEASON



DRY/WET PERFORMANCE



SILENCE



LONG-LASTING



DRAINAGE PERFORMANCE



QUIET PERFORMANCE



SNOW PERFORMANCE



COMFORTABLE



HANDLING PERFORMANCE

With its outstanding low-noise performance, all-season applicability, and safety and durability features, the HTX AS significantly enhances driving comfort.

Size	PR	Loading Index	Speed Rating	Tread Depth	Inflatable Section Width (mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
275/60R20	-	115	T	8.7	275	8.0J	838	560AA	1215	2679	300	44	BSW
275/55R20	-	117	H	8.7	275	8.5J	810	560AA	1285	2833	340	50	BSW
LT275/70R18	10PR	125/122	S	10.3	275	8.0J	843	-	1650/1500	3640/3305	550	80	BSW
275/65R18	-	116	H	8.7	275	8.0J	815	560AA	1250	2756	300	44	BSW
265/70R18	-	116	H	8.7	265	8.0J	829	560AA	1250	2756	300	44	BSW
265/65R18	-	114	H	8.7	265	8.0J	801	560AA	1180	2601	300	44	BSW
265/60R18	-	110	H	8.7	265	8.0J	775	560AA	1060	2337	300	44	BSW
255/55R18	-	109	W	8.7	255	8.0J	737	560AA	1030	2271	340	50	BSW
255/70R18	-	113	H	8.7	255	7.5J	815	620AA	1150	2535	300	44	BSW
255/65R18	-	111	H	8.7	255	7.5J	789	560AA	1090	2403	300	44	BSW
245/60R18	-	105	H	8.3	245	7.0J	751	560AA	925	2039	300	44	BSW
235/65R18	-	110	H	8.3	235	7.0J	763	560AA	1060	2337	340	50	BSW
235/60R18	-	107	V	8.3	235	7.0J	739	560AA	975	2149	340	50	BSW
235/55R18	-	104	V	8.3	235	7.5J	715	560AA	900	1984	340	50	BSW
225/60R18	-	100	H	8.3	225	6.5J	727	620AA	800	1764	300	44	BSW
LT265/70R17	10PR	123/120	S	10.3	265	8.0J	804	-	1550/1400	3415/3085	550	80	BSW
265/70R17	-	115	T	8.7	265	8.0J	804	560AA	1215	2679	300	44	BSW
LT245/75R17	10PR	121/118	S	9.9	245	7.0J	800	-	1450/1320	3196/2910	550	80	BSW
LT245/70R17	10PR	119/116	S	9.9	245	7.0J	776	-	1360/1250	3000/2755	550	80	BSW
245/70R17	-	110	H	8.3	245	7.0J	776	560AA	1060	2337	300	44	BSW
245/65R17	-	107	H	8.3	245	7.0J	750	560AA	975	2149	300	44	BSW
LT235/80R17	10PR	120/117	S	9.5	235	6.5J	808	-	1400/1285	3085/2835	550	80	BSW
235/65R17	-	104	T	8.3	235	7.0J	738	560AA	900	1984	300	44	BSW
235/60R17	-	102	H	8.3	235	7.0J	714	620AA	850	1874	300	44	BSW
225/65R17	-	102	H	8.3	225	6.5J	724	560AA	850	1874	300	44	BSW
225/60R17	-	99	H	8.3	225	6.5J	702	620AA	775	1709	300	44	BSW
215/60R17	-	96	V	8.3	215	6.5J	690	620AA	710	1565	300	44	BSW
LT265/75R16	10PR	123/120	S	10.3	265	7.5J	804	-	1550/1400	3415/3085	550	80	BSW
265/70R16	-	112	T	8.7	265	8.0J	778	560AA	1120	2469	300	44	BSW
255/70R16	-	111	H	8.7	255	7.5J	764	560AA	1090	2403	300	44	BSW
LT245/75R16	10PR	120/116	S	9.9	245	7.0J	774	-	1400/1250	3085/2755	550	80	BSW
245/70R16	-	111	T	8.3	245	7.0J	750	560AA	1090	2403	340	50	BSW
LT235/85R16	10PR	120/116	S	9.5	235	6.5J	806	-	1400/1250	3085/2755	550	80	BSW
235/70R16	-	106	T	8.3	235	7.0J	736	560AA	950	2094	300	44	BSW
235/65R16	-	107	H	8.3	235	7.0J	712	620AA	975	2149	340	50	BSW
LT225/75R16	10PR	115/112	S	9.9	225	6.0J	744	-	1215/1120	2680/2470	550	80	BSW
LT215/85R16	10PR	115/112	S	9.5	215	6.0J	772	-	1215/1120	2680/2470	550	80	BSW
215/70R16	-	100	H	8.3	215	6.5	708	560AA	800	1764	300	44	BSW

Balanced strength, wonderful in all seasons

The tread block rigidity distribution and rubber compound formula are optimized, which can respond sensitively on dry roads, drain water quickly on wet roads, and provide reliable grip on light ice and snow roads, meeting the diverse driving needs throughout the year.

Noise reduction structure optimization design

The grooves are designed to be non-parallel, disrupting the airflow path and preventing the air in the grooves from being continuously compressed to produce "pumping noise". The partially closed shoulder can effectively block the noise transmission.

Wear-resistant pattern design

Symmetrical pattern design evenly divides the tread area to avoid stress concentration and extend tire service life. Small grooves can cut through the water film to ensure that the tread is in contact with the road through the accumulated water.

Control optimization

The four longitudinal grooves combined with the zigzag edge design of the tread blocks improve drainage performance and reduce anxiety about sudden weather. When facing regular icy and rainy roads, every braking and acceleration is safe and reliable.

